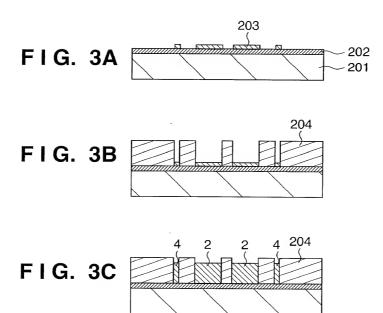


FIG. 3D



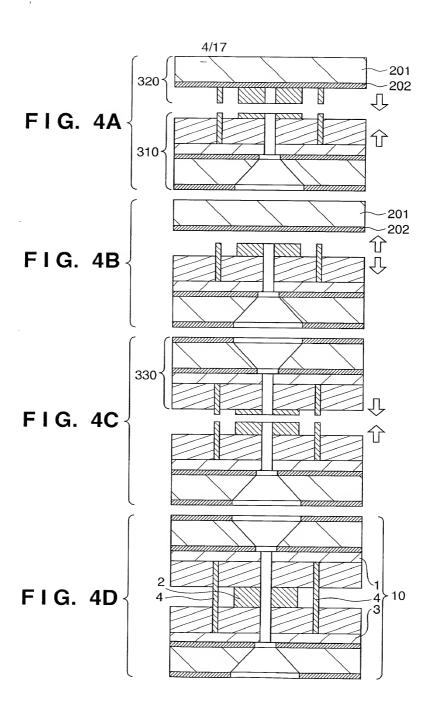


FIG. 5


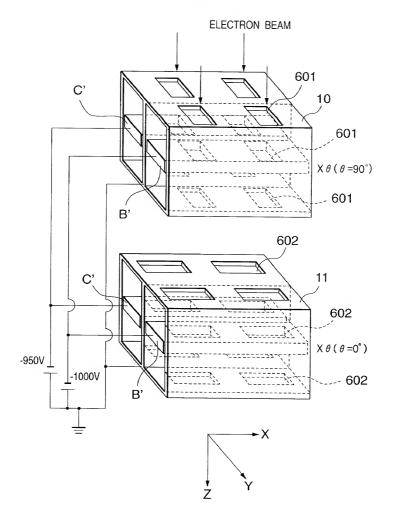


FIG. 6




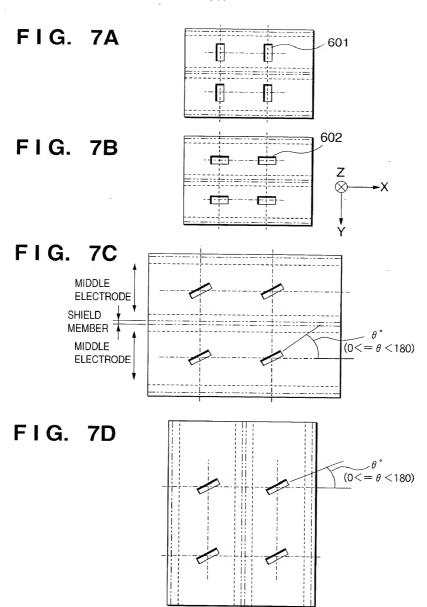


FIG. 8

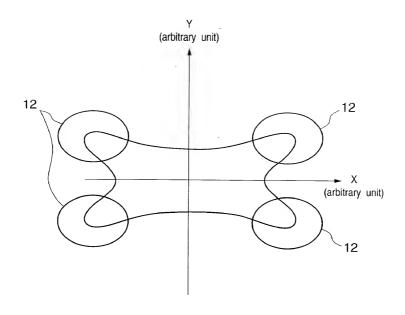

F I G. 9





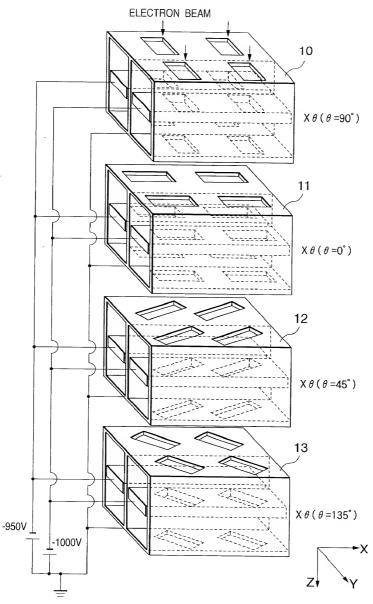



FIG. 10

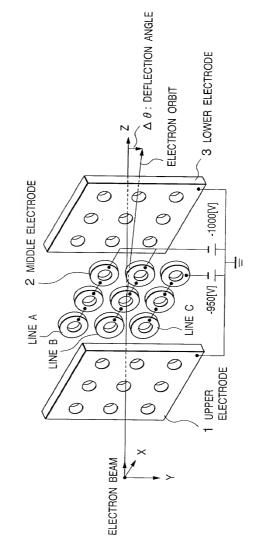

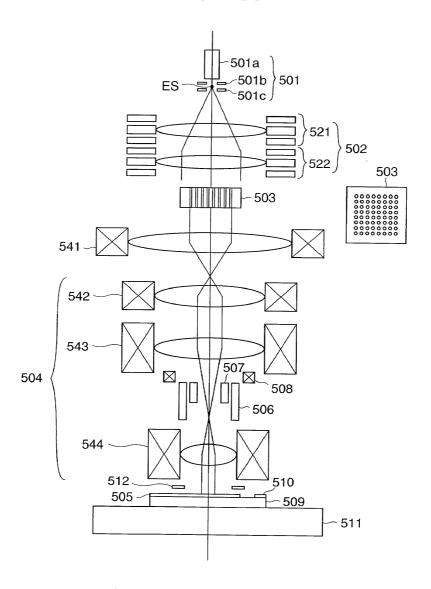

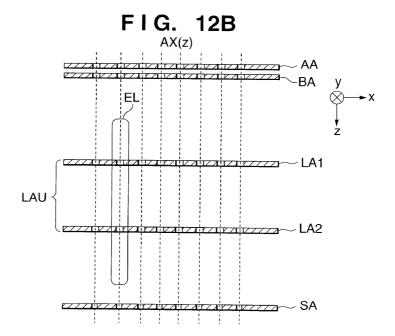

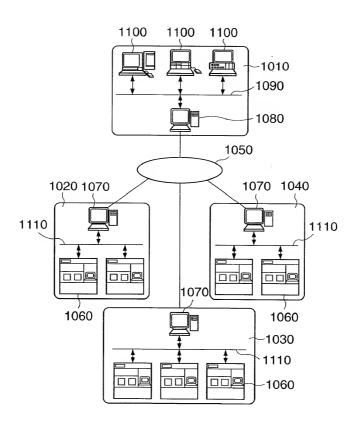

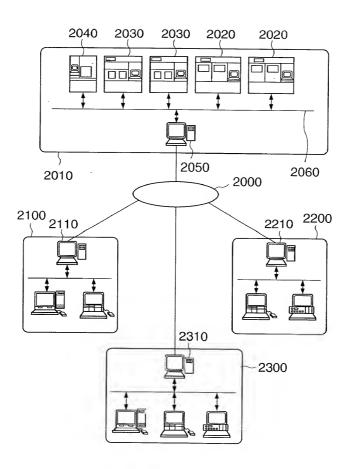

URL http://	//www.maintain.co.jp/db/input.html
TROUBLE DB INPUT WINDOW	
OCCUBBEN	NCE DATE 2000/3/15 ~ 4040
TYPE OF APPARATUS ******** ~ 4010	
_	OPERATING ERROR (START-UP ERROR) 4030
1	MBER S/N 465NS4580001 ~ 4020
DEGREE OF URGENCY D ~4050	
SYMPTOM	LED IS KEPT FLICKERING AFTER  POWER-ON   4060
REMEDY	POWER ON AGAIN  立
	(PRESS RED BUTTON IN ACTIVATION) 4070
PROGRESS	INTERIM HAS BEEN DONE
	<u></u> 4080
(SEND) (RE	SET) 4100 4110 4120
LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATING GUIDE	

FIG. 16

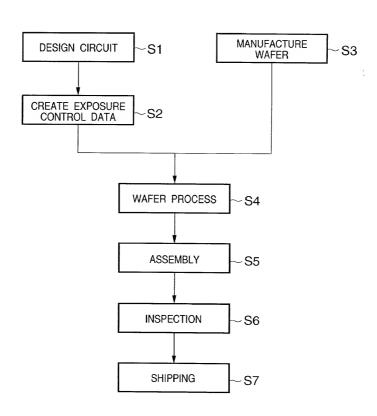


FIG. 17

